


# 8060

## Tee

# Gr8LOK by GRUVLOK®

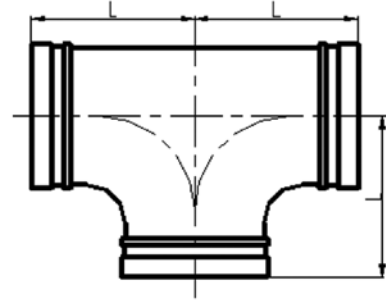

### MATERIAL SPECIFICATIONS

#### CAST FITTINGS:

Ductile Iron conforming to ASTM A-536

#### FINISH:

Rust inhibiting paint – Color: Red (standard)

Hot Dipped Zinc Galvanized conforming to ASTM A-153 (optional)

For other coating requirements contact an Anvil Representative.

Nominal Size mm/in	Pipe O.D. mm/in	Max. Working Pressure MPa/PSI	Dimensions L mm/in
25	33.7	3.45	57.0
1	1.327	500	2.24
32	42.4	3.45	70.0
1 1/4	1.669	500	2.75
40	48.3	3.45	70.0
1 1/2	1.900	500	2.75
50	60.3	3.45	82.5
2	2.375	500	3.25
65	73.0	3.45	95.0
2 1/2	2.875	500	3.74
65	76.1	3.45	95.0
2 1/2	3.000	500	3.74
80	88.9	3.45	108.0
3	3.500	500	4.25
100	114.3	3.45	127.0
4	4.500	500	5.00
125	133.0	3.45	122.0
5	5.250	500	4.80
125	139.7	3.45	140.0
5	5.500	500	5.50
125	141.3	3.45	140.0
5	5.563	500	5.50
150	165.1	3.45	165.0
6	6.500	500	6.50
150	168.3	3.45	165.0
6	6.625	500	6.50
200	219.1	3.45	197.0
8	8.625	500	7.75
250	267.4	3.45	229.0
10	10.528	500	9.00
250	273.0	3.45	229.0
10	10.750	500	9.00
300	318.5	3.45	254.0
12	12.539	500	10.00
300	323.9	3.45	254.0
12	12.750	500	10.00
350	377.0	2.07	279.0
14	14.840	300	10.98
400	426.0	2.07	305.0
16	16.770	300	12.00